



TAURUS  
CRACO

barbaric



# Panel handling

compact - fast - custom-made



[www.tauruscraco.com](http://www.tauruscraco.com)

# Ideas that move.

As a successful and dynamic company with headquarters and production facilities in Austria, Barbaric is the first point of contact for sophisticated lifting technology.

Our goal is to provide customers with customized solutions in the areas of panel and parts handling. By using the most modern components developed

in-house, Barbaric is able to realize ergonomic systems with high profitability and short payback times.

Our know-how results in machines with special attention to speed, design and durability.

Return system  
**RTS Compact** Universal, simple return system with maximum benefit

Return system  
**RTS Professional** Intelligent return system with and without stacking option

Return system  
**RTS Industrial** Industrial return system for working loads up to 100 kg

Automatic  
part handling For throughput machines for flexible batch size 1 production

Return system

# RTS Compact



**Universal, simple return system with maximum benefit**



- > Connectable with edgebanders of all manufacturers
- > One-man operation of the edgebander possible
- > Highest level of ergonomics
- > Savings in personnel costs
- > Careful material transport
- > Installation time approx. 0,5 days
- > Rotation device for small parts

Optionally with „Extension Conveyor Technology RTS Compact“ for easy turning of parts during transverse edging.

Can be optionally equipped with the „Ergonomics Package RTS Compact“. A lifting table and an air cushion table are used at the end of the return conveyor. This option enables ergonomic working.



## Simple connection to edgebanding machine

The RTS Compact is a standalone system that can be independently connected to any edgebander regardless of the brand. The throughput speed can be continuously adjusted to match the edgebander speed.

The RTS Compact is shipped as a complete package including a control cabinet and is ready for operation immediately after installation.

## Conveyor

Careful material transport due to plasticcoated special rollers. Special finger conveyors ensure that the parts are safely taken over by the edgebander. The longitudinal measurement of the parts is carried out in the integrated control unit. An electrical connection to the edgebander is not required.

## Technical data

» Working load	max. 60 kg
» Cycle times	up to 10 parts/min.
» Throughput speed	7 - 20 m/min. variable speed optional up to 30 m/min.

### Panel sizes


» Length	300 - 2800 mm
» Width	120 - 1300 mm
» Thickness	8 - 60 mm

### Square parts

» Panel size min.	300 x 120 mm
» Panel size max.	1300 x 1300 mm

Panel sizes refer to the type without „RTS Compact conveyor system extension“. Larger parts can be removed manually when edged on 4 sides.

Subject to technical changes.

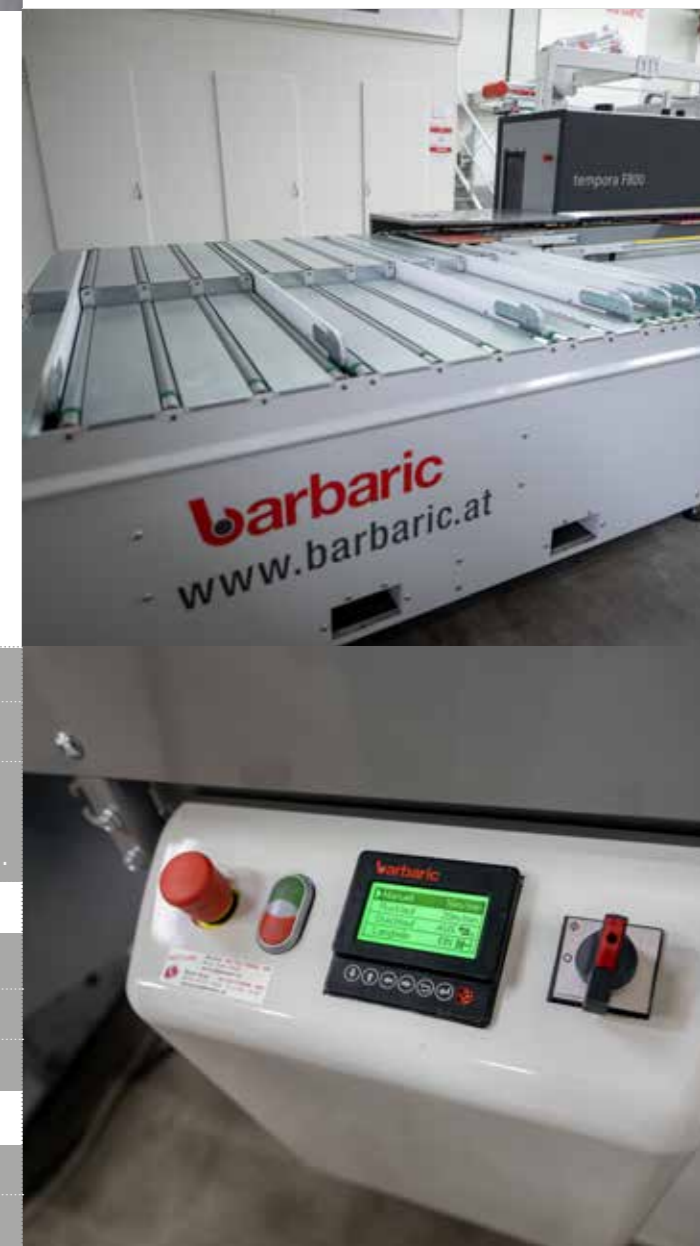

Ideas that move.

Return system

# RTS Professional




## Intelligent return system with and without destacking function



## Manipulator

- > Automatic adjustment of machine speed depending on part size
- > Measurement of the parts during takeover from the edgebander
- > High speed due to independent positioning of the manipulator in the center of the parts
- > Standard speeds of 10 - 20 m / min.
- > Optional transfer of the throughput speed
- > Machine visualization on the touchscreen display

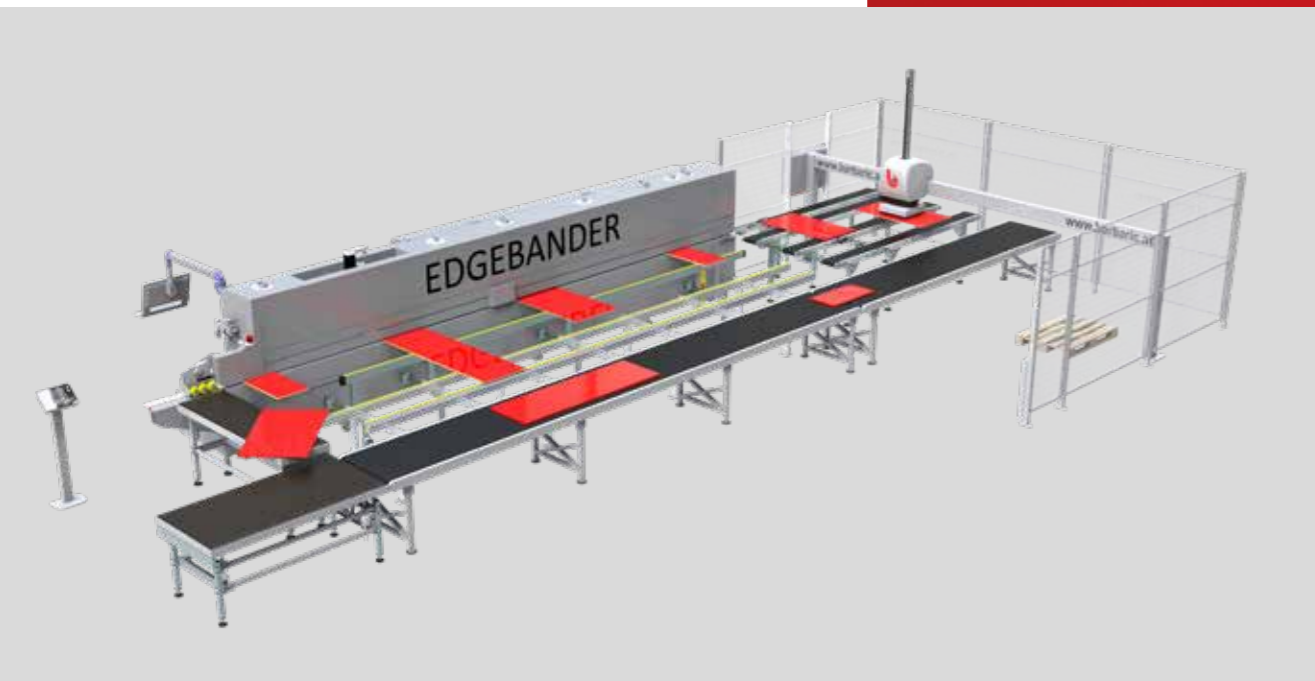

## Modular and customer-specific production

Through our intelligent and modular product design we can assemble an individual and ideal solution for fast handling at the edgebander. Installation and start-up is quick and easy as all components come preassembled.



- > Connectable to edgebanders of all manufacturers
- > 90° / 180° turning function
- > One-man operation of the edgebander possible
- > Highest level of ergonomics
- > Savings in personnel costs
- > Careful material transport
- > Optional stacking of finished parts on pallet or conveyor belt possible



## Networking and communication

Optionally, part information and details can be imported from an ERP system or directly be read before the task with a barcode scanner. The control system offers a wide range of communication options to connect to the edgebander.


Ideas  
that move.

[www.tauruscraco.com](http://www.tauruscraco.com)


**barbaric**

# Overview of types


RTS Professional without destacking function

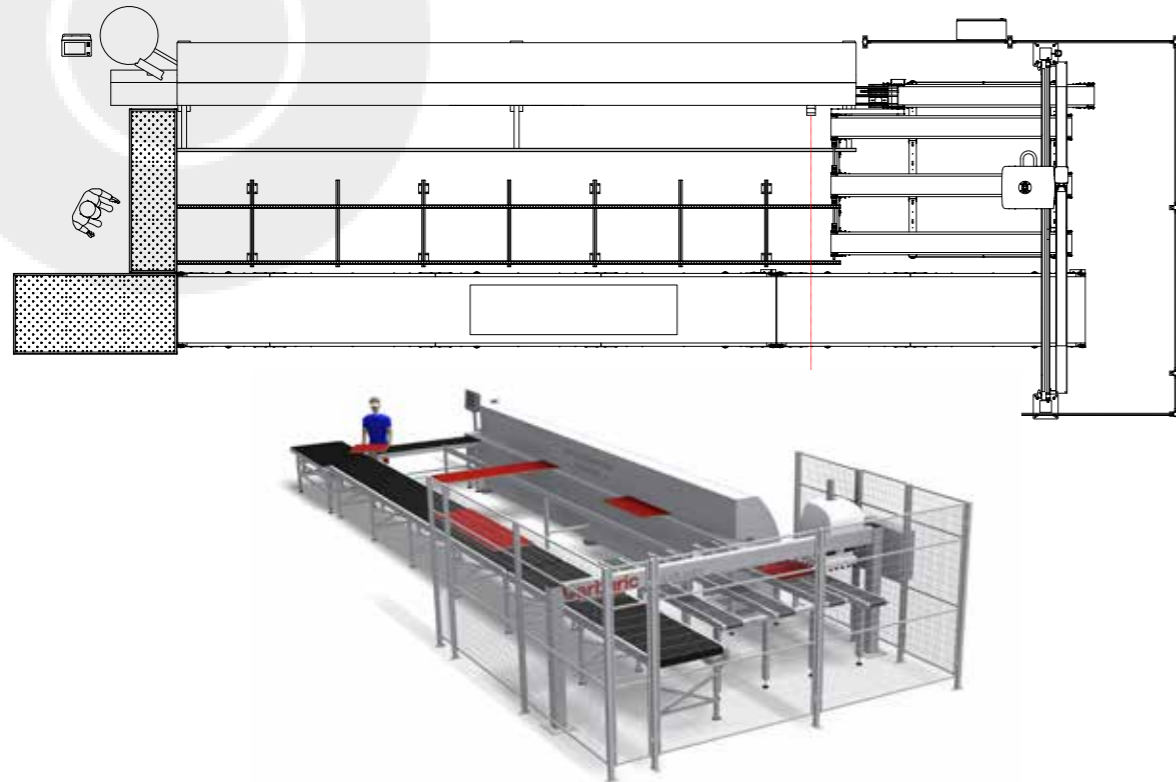

RTS Professional with destacking function

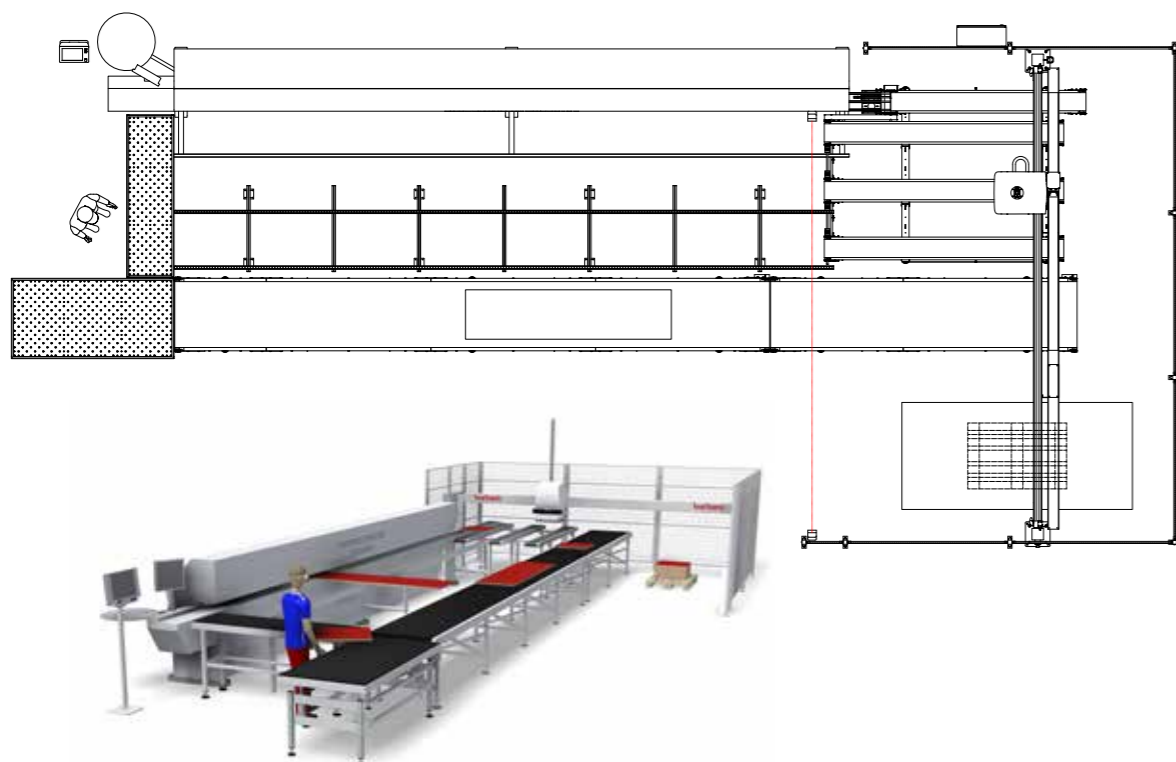

RTS Professional with additional traversing axis  
(Stacking system)

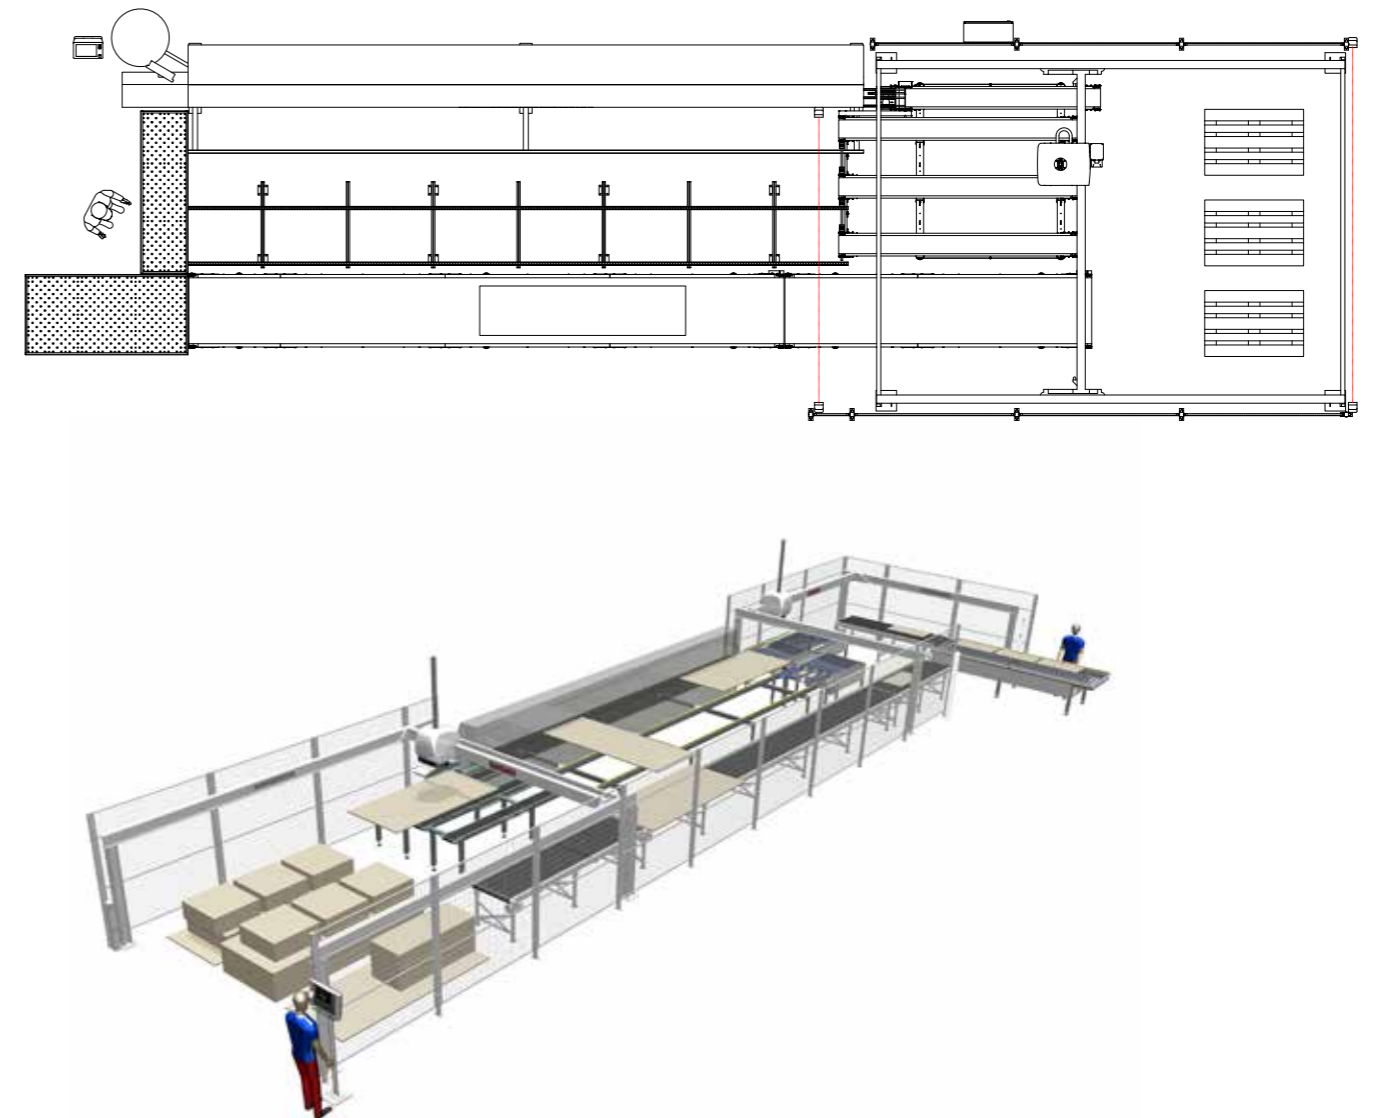

Customer installation at  
Sandhas Werkstätten GmbH

**barbaric**

Ideas  
that move.

[www.tauruscraco.com](http://www.tauruscraco.com)



## Control and operation

Various machine configurations can be realized with our standard software.

- > Selection of all motion functions
- > Integrated service tool for remote maintenance
- > Simple, touch-enabled surface
- > Windows-based
- > Extensive error analysis, with optional camera tool
- > Continuous mode for oversize



## Production cycle

The combination of part registration and data connection allows an optimal communication to all machines in the production line.

## Destacking function

Depending on the design of the machine, several stacking stations can be defined. The software also allows formation of interlocked layers for serial parts. Further, lifting tables can be implemented to increase performance.



## Stack editor

In connection with an ERP system, the individual stacking layout can be defined by a wide range of criteria, such as: customers, truck tours or internal logistic requirements. Our special stack editor tool also allows the placement of multiple parts in one layer of the stack. Even after initial set-up the machine operator can easily make changes to the existing stacking layout if needed.



## Dual mode

Our machine also features „dual mode“ in which the machine picks up two parts at simultaneously to maximize throughput. The operator decides if the parts should be stacked or returned.




## Intelligent and modular design

The individual arrangement of our standard components creates customer-specific and cost-efficient solutions for optimized material handling.

Ideas  
that move.

# RTS Professional

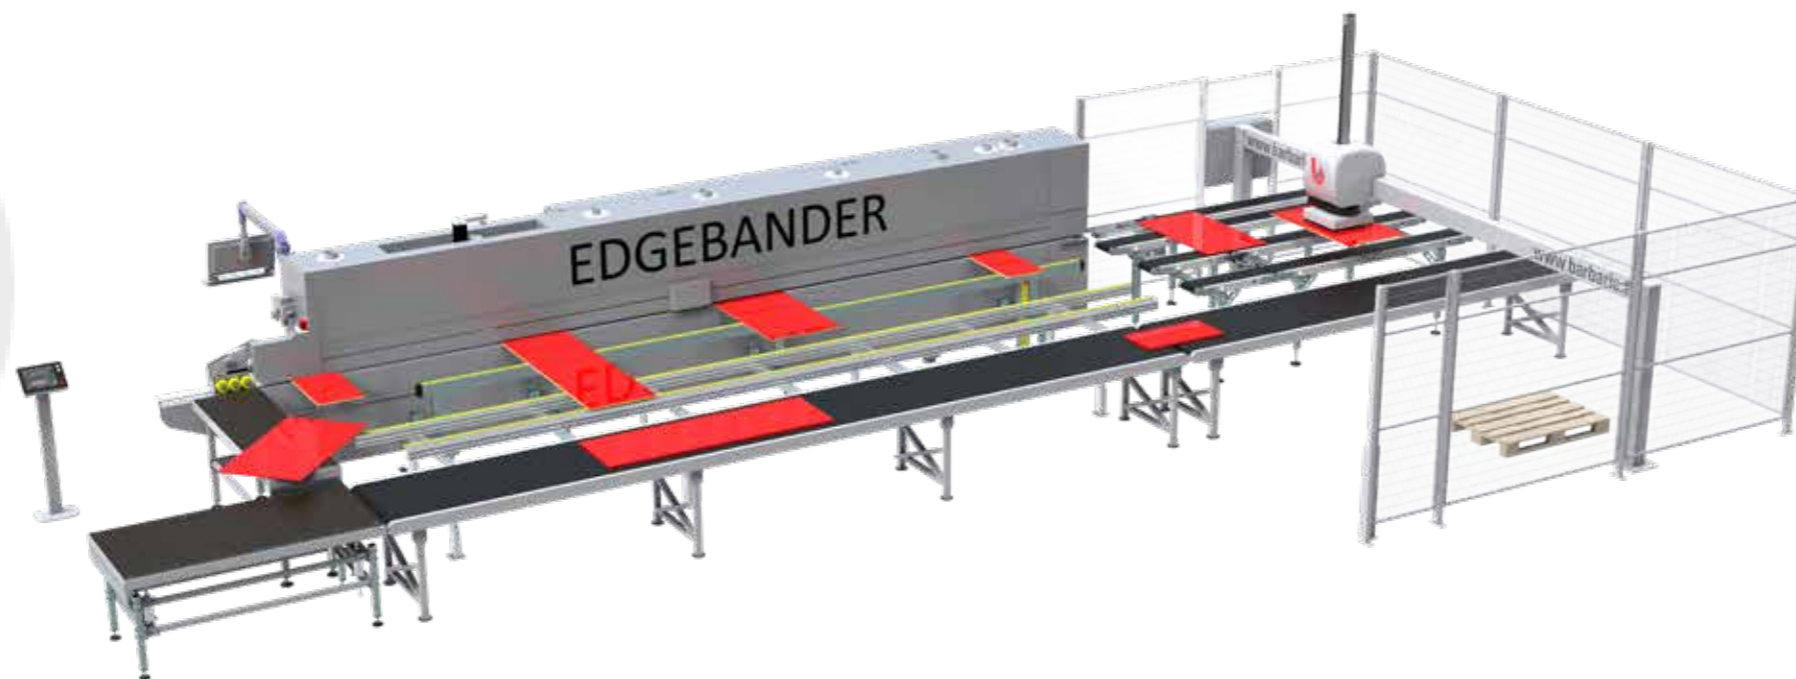

## Technical Data

### Function and operation

Highly efficient production facilities require modern control systems.

- > Visualization on a 17" touch display
- > Intuitive user interface and modern layout
- > Secure part return
- > Continuous mode for oversize
- > Rotation unit 90° / 180°
- > Part measurement
- > Destacking function incl. layer formation
- > Remote maintenance tool preinstalled
- > Signal exchange with edgebander
- > Data connection to edgebander possible

### Your benefits at a glance

- > Gentle manipulation, through vacuum suction technology, no more material damages
- > Flexible in the part size
- > Adaptation to the space conditions
- > Reduced personnel costs
- > Simplification and alleviation of production processes
- > Higher machine utilization
- > Connectable to edgebanders of all manufacturers
- > Retrofitting with existing edgebanders possible
- > Highest flexibility in the production process
- > Payback times of less than one year
- > Fully automated handling of parts

	STANDARD	OPTIONAL
» Working load	60 kg	
» Throughput speed edgebander	10 - 20 m/min.	30 m/min.
» Panel size	min. 80 x 300 mm max. 2800 x 1300 mm	Larger on request
» Panel thickness	8 - 60 mm	
» Cycle times	up to 10 parts/min.	Dual mode
» Stroke movement	electric motor	
» Rotation movement	electric motor	
» Stack height over ground	800 mm from euro pallet	1200 mm from euro pallet
» Operating pressure	6 bar	
» Voltage	400 V, 50 Hz	Transformer for 480 V / 600 V, 60 Hz
» Total output	3,5 kW	
» Air consumption	420 NI/min.	

Return system

# RTS Industrial



**Industrial return system  
for working loads up  
to 100 kg**



That makes the  
difference

The manipulator for the RTS Industrial was designed for use in industrial environments. Loads of 100 kg as well as parts up to 4100 mm in length characterize this type of return system.



## Suction traverse

Due to the adjustable suction crossbeam, large and long panels can be picked up stably. On the other hand, for small parts, the suction cups are reduced to a compact cross beam.



## Data interface

We offer standardized data interfaces to well-known manufacturers of edge banding machines as well as to control systems. By scanning the parts before processing, all part-specific information is retrieved. The system thus operates fully automatically without any operator intervention.


- > Connectable to edgebanders of all manufacturers
- > 90° / 180° turning function
- > One-man operation of the edgebander possible
- > Highest level of ergonomics
- > Savings in personnel costs
- > Careful material transport
- > Industrial version of the manipulator
- > Optional stacking of finished parts on pallet or conveyor belt possible

Ideas  
that move.

[www.tauruscraco.com](http://www.tauruscraco.com)

**barbaric**



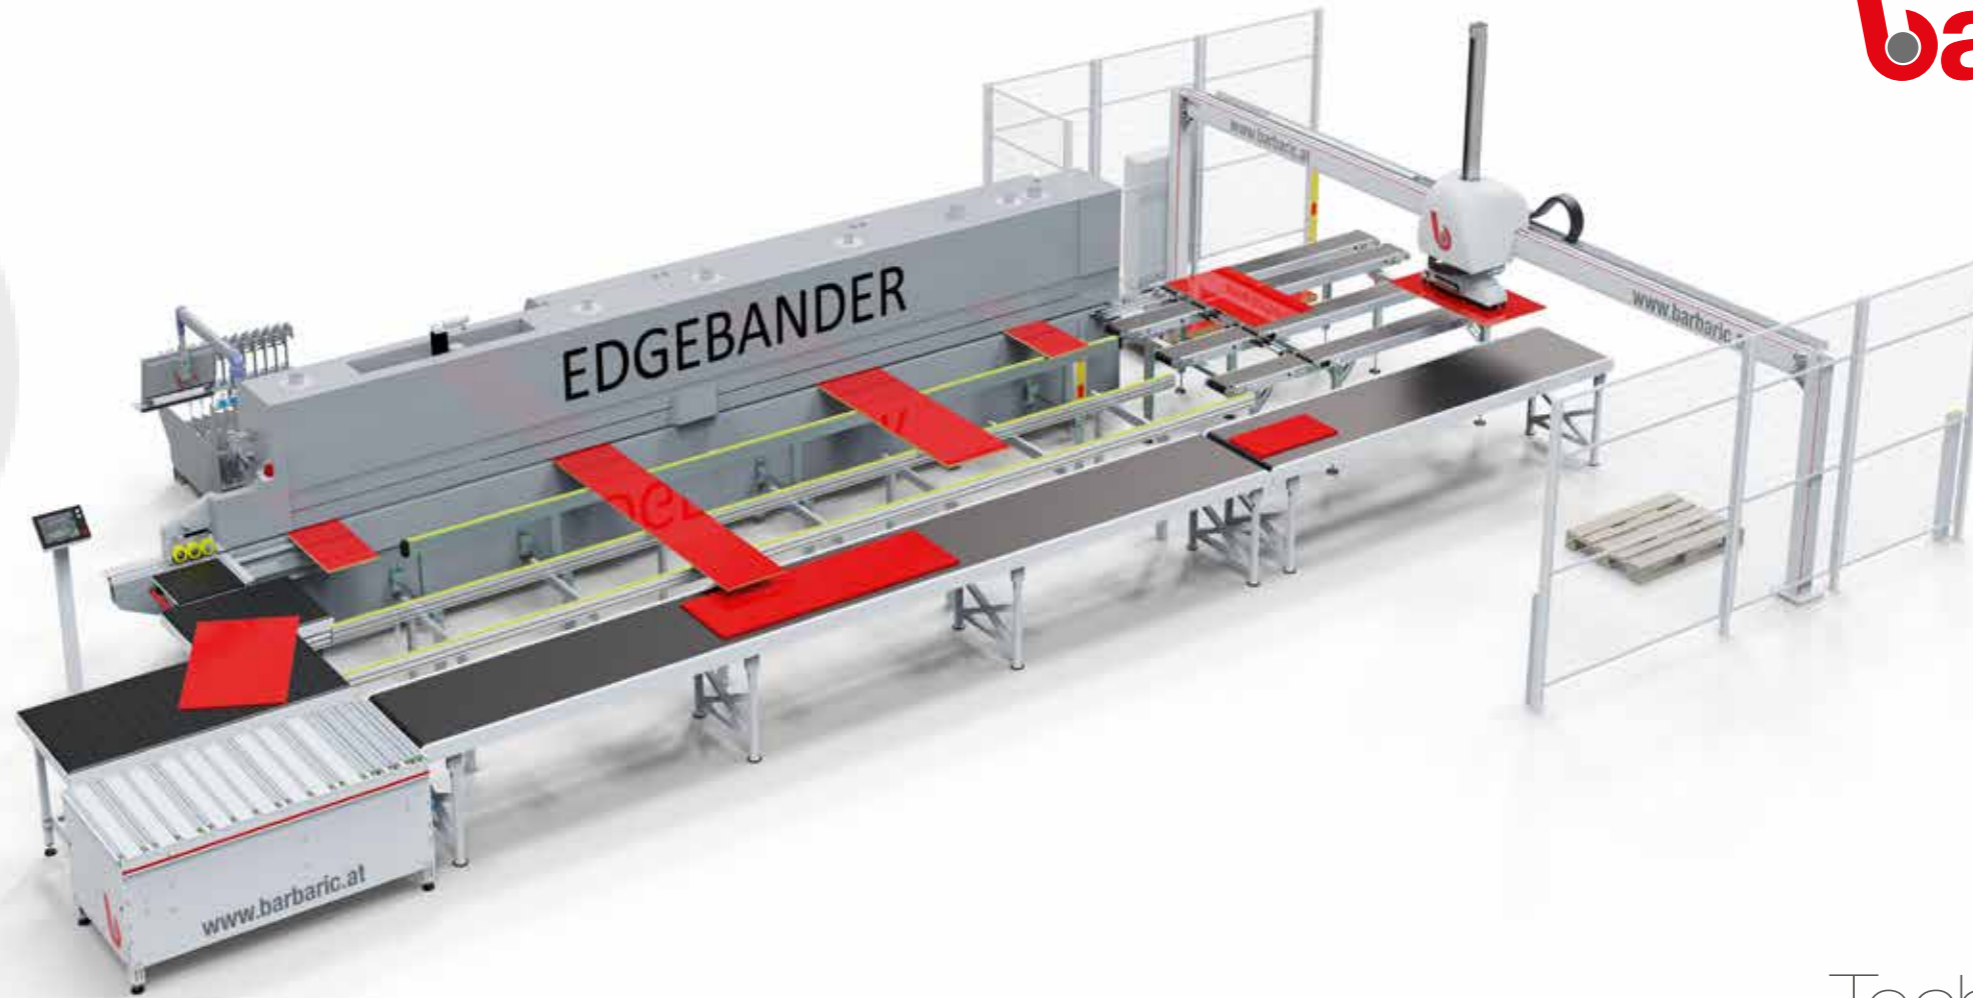

## Technical data

### Function and operation

- > Visualization on a 12" touch display
- > Intuitive user interface and modern layout
- > Secure part return
- > Continuous mode for oversize
- > Rotation unit 90° / 180°
- > Part measurement
- > Remote maintenance tool preinstalled
- > Signal exchange with edgebander
- > Data connection to edgebander possible

### Your benefits at a glance

- > Gentle manipulation, through vacuum suction technology, no more material damages
- > Flexible in the part size
- > Adaptation to the space conditions
- > Reduced personnel costs
- > Simplification and alleviation of production processes
- > Higher machine utilization
- > Connectable to edgebanders of all manufacturers
- > Highest flexibility in the production process
- > Payback times of less than one year
- > Fully automated handling of parts

	STANDARD	OPTIONAL
» Working load	100 kg	on request
» Throughput speed edgebander	10 - 20 m/min.	30 m/min.
» Panel size	min. 80 x 300 mm max. 2800 x 1300 mm	max. 3600 x 1300 mm Larger on request
» Panel thickness	8 - 60 mm	
» Cycle times	up to 10 parts/min.	Pass through mode for oversizes
» Stroke movement	electric motor	
» Rotation movement	electric motor	
» Operating pressure	6 bar	
» Voltage	400 V, 50 Hz	Transformer for 480 V / 600 V, 60 Hz
» Total output	5 kW	
» Air consumption	420 NI/min.	



# Operator handling


(for RTS Professional and RTS Industrial)



## Inclined running tracks

Optionally, we can install a roller track with an incline after the return conveyor belt. Through gravity the parts slowly roll to the end of the track where they are manually removed by the operator.

Länge: 2000 mm, optional 2500 mm  
Breite: 800 mm

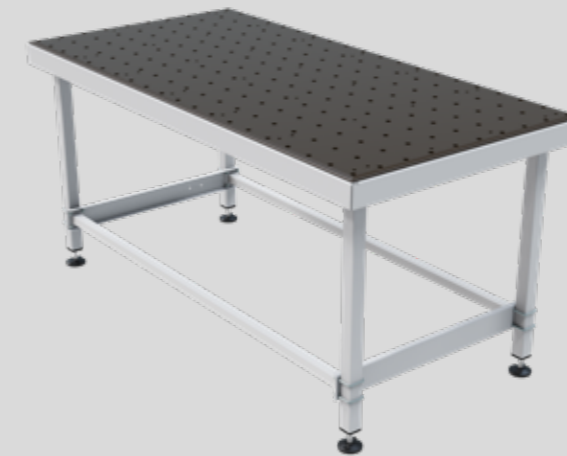

## Air table at the edgebander

In combination with the conveyor system we offer a wide variety of air cushion tables with an integrated blowing unit for easy panel manipulation.

## Lifting table

At the end of the conveyor belt we can optionally install a table with a pneumatic lifting unit. The table features an air cushion surface where parts can be manipulated effortlessly. The lifting unit returns the parts to the original height of the edgebander part entry point for extra smooth and fast operation.



Length: 2000 mm, optional 2500 mm  
Width: 1000 mm



## Sliding table

At the infeed station a sliding air cushion table is installed. This table allows a fast and easy insertion of large parts into the edgebander.

Length: 980 mm  
Width: 780 mm  
Displacement area: 800 mm

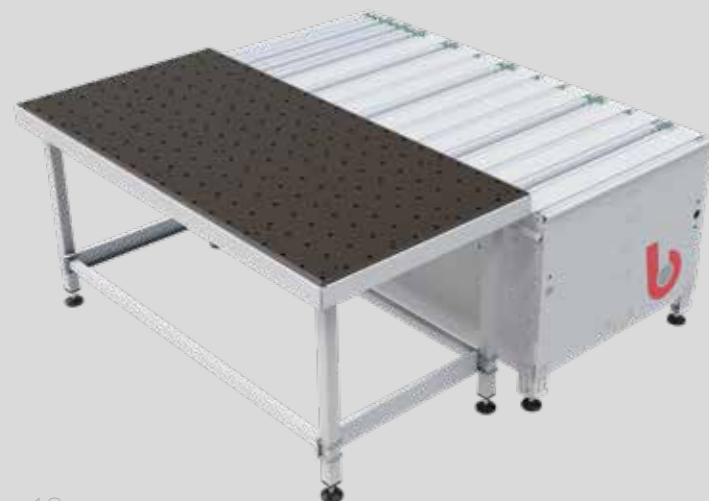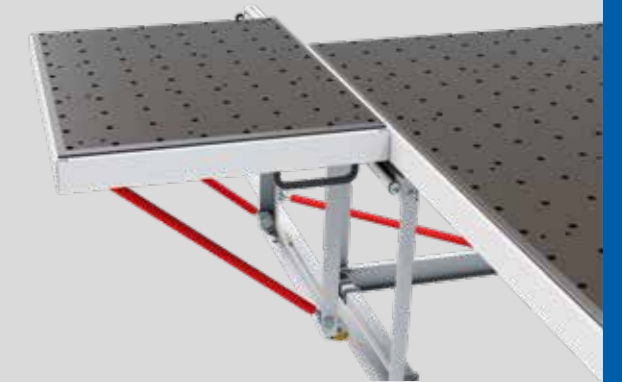

## Conveyor

A lifting conveyor is placed at the end of the return conveyor belt. From there the parts are taken over to a roller track and are automatically transported to the point of part entry at the edge bander. The lifting unit returns parts to the edgebanders height allowing the machine operator to effortlessly manipulate even large and heavy parts.

Length: 2000 mm | Width: 2000 mm  
Stroke: 80 mm



## Movable air cushion table with stop system

As a professional feeding aid, we offer a freely erectable air cushion table with a stop system. The table can be moved on machine guides and has an automatic stop system at the same time. With this design, the operator is actively supported when feeding the edge banding machine.

Return system

# Automatic parts handling



## Automatic parts handling for throughfeed machines for flexible batch size 1 production



With the Return series from Barbaric, the return of edged parts is already completely standardized. On this basis, we implement fully automatic systems on throughfeed machines such as edge banders or drilling lines. Data connections can be realized individually and form the central control of the entire system.



## Conveyor technology


Whether simple conveyor belts, roller conveyors or complex conveyors with lifting cross conveyor technology, we offer a wide range of solutions due to our in-house construction department. The speeds of the conveying elements go up to 70 m/min. to also offer an appropriate performance.



## Stacking patterns

Stacking of finished parts or intermediate buffering are central functions of a batch size 1 system. Finished parts can be stacked on several pallets. With intelligent stacking logic, we create stable stacks that are already pre-sorted for subsequent production.

Ideas that move.

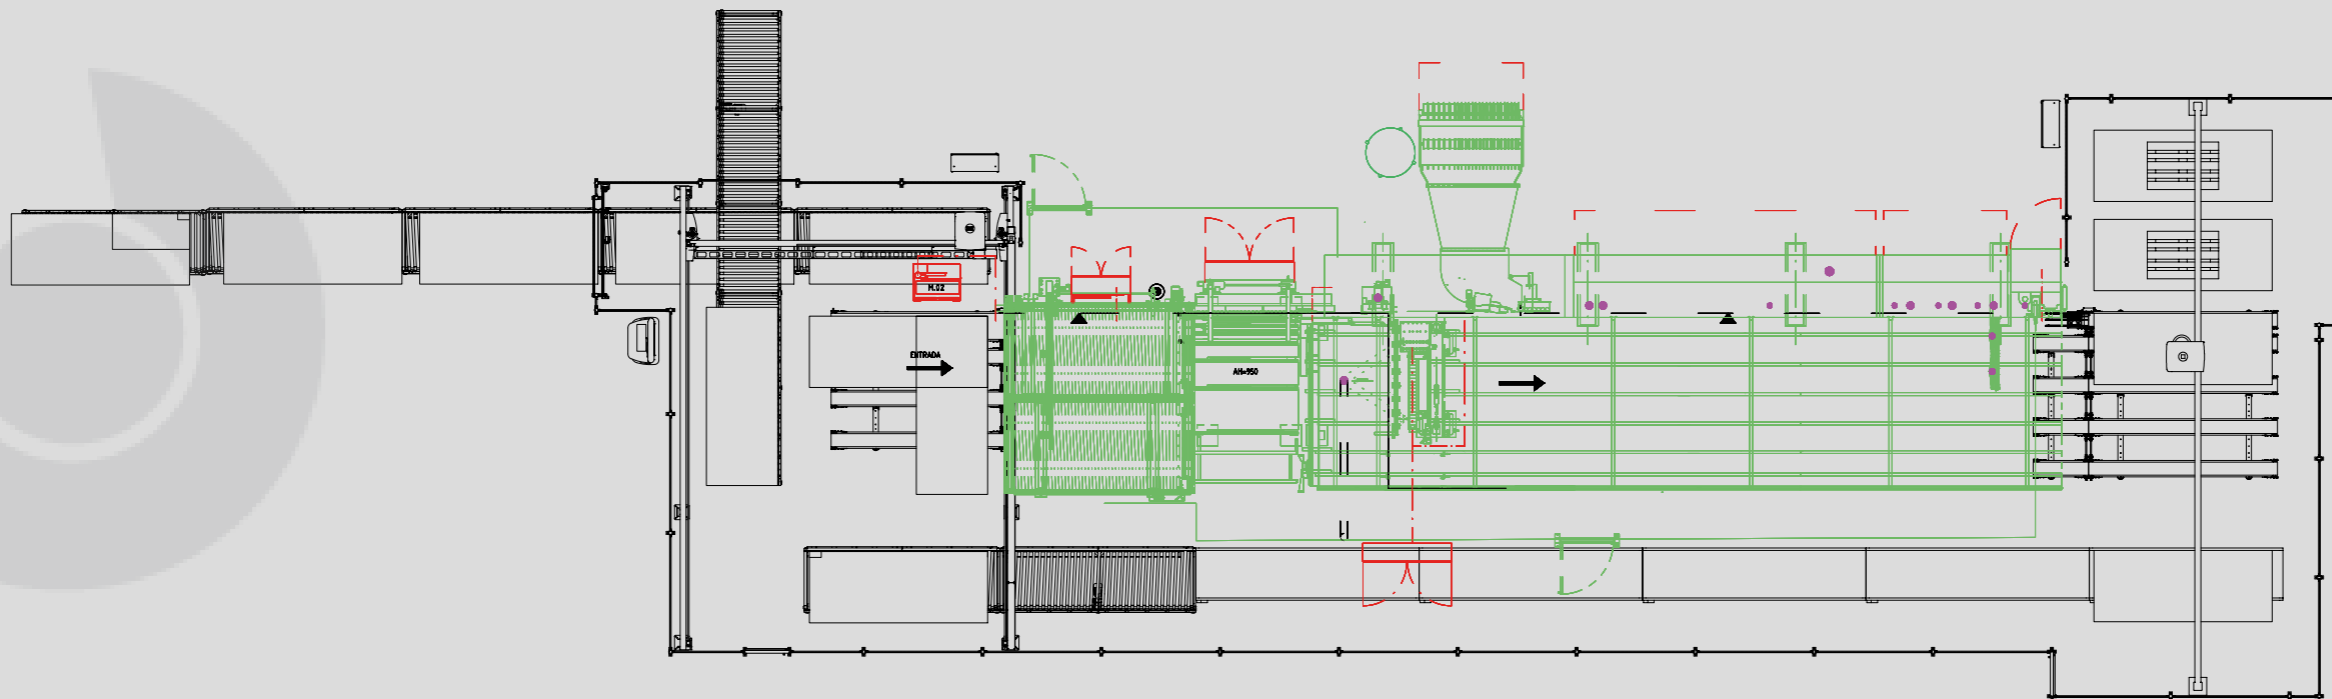

## Networking of the processing machines

The part data must be available at the right time and also passed on to the processing machines. Thanks to a large number of projects, we can offer a large number of different interfaces. Parts tracking within the system is handled by the „BPC“ software module. A corresponding visualization forms the link between machine and operator.




## Performance at an attractive price

Due to our experience in the field of automation and many standard components we can offer attractively priced solutions for craft and small industrial companies. An output of 1000 to 1200 parts per shift is possible.

## Independence

Barbaric, as an independent company, cooperates with all well-known manufacturers of processing machines in furniture production. A considerable advantage for customers. The customer decides which processing machine to use and Barbaric supplies the automation and machine control.

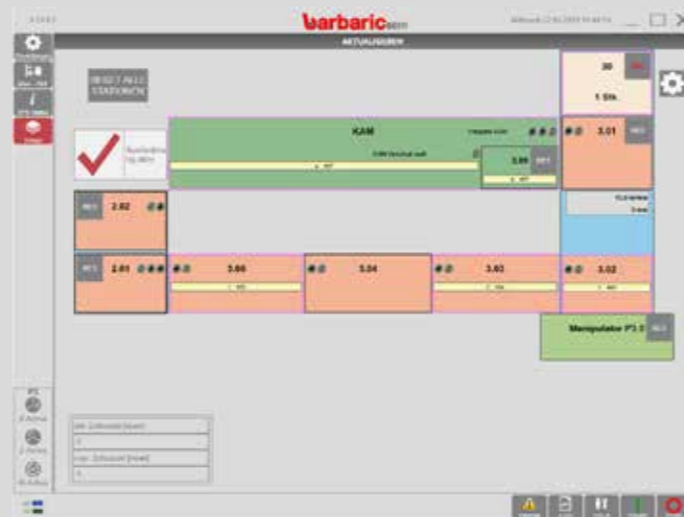

## Highlights

- > Automation of the edge banding machine
- > Flexible batch size 1 production
- > Dynamic motion technology
- > Integration of conveyor technology
- > Part recognition by means of barcode
- > Automatic part feeding into the edgebander
- > Communication with various industry programs
- > Stacking function with various stacking patterns
- > Fully automatic process without operator

**barbaric**



Your competent partner also in panel and parts handling for trade and industry



At Barbaric, our goal is to provide optimal solutions for every handling application. In addition to our automatic handling solutions in the field of panel and parts handling for commercial or industrial production lines, we also develop manual vacuum lifters for all remaining manual lifting processes.



## Service / After-Sales

WE RELY ON A GOOD CUSTOMER RELATIONSHIP - EVEN AFTER THE SALE.

Quality, efficiency and innovation - three keywords that apply specifically to Barbaric's service competence. The employees of our service hotline have been with us for many years and have

excellent knowledge of our products. They will be happy to help you - no matter whether it is a spare part, maintenance or service request.

### Automatic panel and part handling



Our intelligent solutions are used by many customers around the globe.

- > Panel storage systems
- > Feeding systems
- > Buffer storage
- > Return systems

are just a few examples of modern systems in the field of material handling. Each system in this area is built individually according to our customers' requirements, while existing components and proven concepts are used.

### Manual handling solutions

For customers in the wood, glass industry or for construction site use, we offer the suitable lifting equipment. Barbaric provides optimal handling solutions for safe and ergonomic lifting applications. Manual vacuum lifters from Barbaric enable efficient handling of heavy panels or glass and save valuable time in production. Heavy lifting tasks can be performed effortlessly by just one operator. By purchasing suitable handling solutions, sickness-related absences can be minimized and attractive jobs created for the employees.

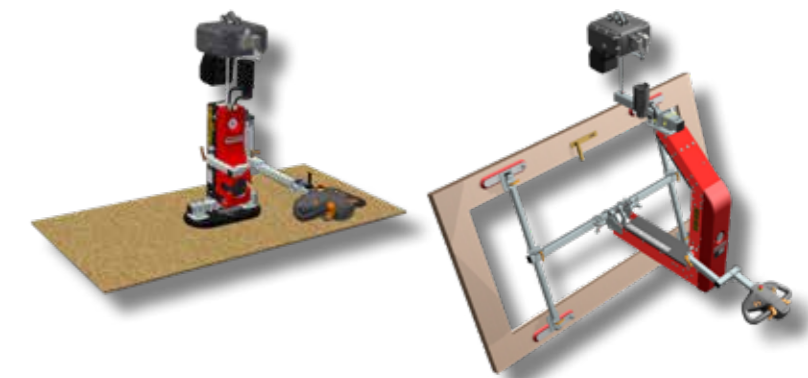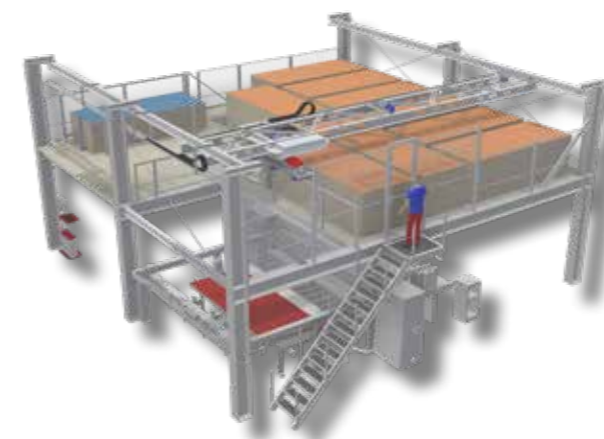

[www.tauruscraco.com](http://www.tauruscraco.com)